




SELECT-O-FLOW®

Select-O-Flow®

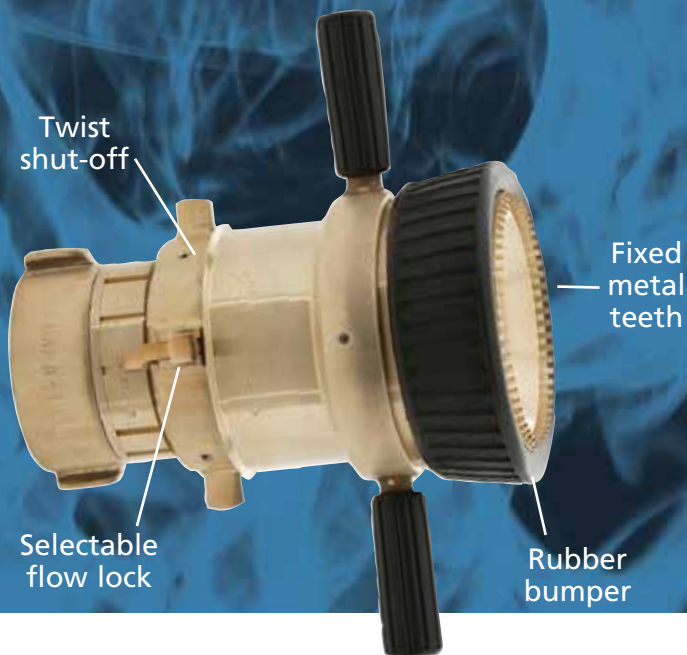

- Selectable flow rate, changeable even during flowing conditions
- Constant flow nozzle — straight stream, narrow fog (30°), or wide fog (90°)
- Flow efficient with a fully machined waterway for excellent stream quality
- Construction:
 - Elk-O-Lite® nozzles are hard anodized with chrome-plated trim and rubber bumper
 - Corrosion resistant brass nozzles have a heavy-duty protective rubber bumper
- Low maintenance components
- AFFF compatible

6-13

Base Size	FLOW RATES	PRESSURE	MATERIAL		Effective Reach (Feet) @ Highest Flow	Weight (Lbs.)	MODEL	FIGURE
	GPM (LPM)	PSI (BAR)	Brass	Elk-O-Lite®				
2.5"	300/550/750 (1136/2082/2839)	100 (6.89)		•	221	7.6	CSW	1
	350/500/750/1000/1250 (1325/1893/2839/3785/4732)			•	350	10.0	CSW-L	1
			•		350	21.4	CSW-LB	2

SELECT-O-FLOW® CONFIGURATIONS

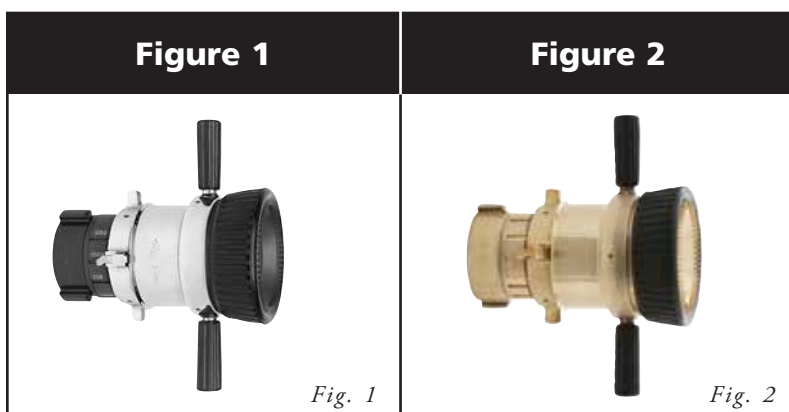


Fig. 1

Fig. 2

OPTIONS

THREADS

All nozzles are NHT unless otherwise specified.
See index T-13 for optional base threads.