

## STORZ Building Connections

**KOCHEK** Storz Building Connections are used as an auxiliary inlet to help supplement a fire protection system's water supply. Coupling reduces the typical connect time for emergency responders versus traditional threaded appliances. The lugged Storz head and cap make installation easy with standard wrenches in the market. The Nitrile gasket seals the Storz head and cap. This seal prevents moisture and foreign matter from entering the connection. Our Stainless Steel locking lever keeps the cap engaged and is a means for the installer to know when seal is complete.


**KOCHEK** offers various finishes to choose from versus the standard powder coat options. Special thread request are satisfied in house domestically with a fully automated machining process.



Storz X NPT Rig F 30° Elbow W/ Cap 4" & 5" 30 Degree Storz



MODEL	PATTERN	"A" Dimension	Rated Pressure(psig)
SFDCEB44N	30 Degree	7 7/8"	250 PSI
SFDCEB54N	30 Degree	8 3/4"	250 PSI
SFDCEB56N	30 Degree	10 5/8"	250 PSI

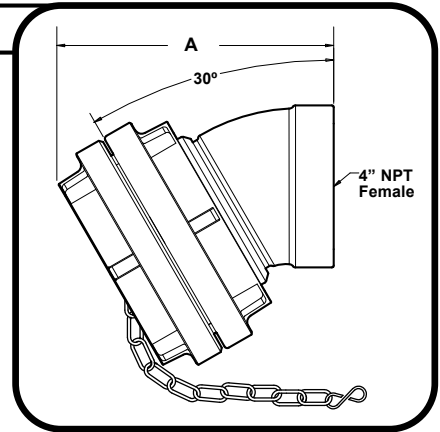


### SPECIFICATIONS

**MATERIAL:** Forged Aluminum T6160, Nitrile Gasket  
**FINISHES:** **STANDARD:** Powder coat (17 standard colors)  
**OTHER CHOICES:** Hard coat, K-Chrome and K-Brass

Storz X NPT Rig F W/ Cap 4" & 5" Straight Storz FDC



MODEL	PATTERN	"A" Dimension	Rated Pressure(psig)
SFDC44N	Straightway	4 1/8"	250 PSI
SFDC54N	Straightway	4 3/8"	250 PSI
SFDC56N	Straightway	5 7/8"	250 PSI
MODEL	PATTERN	SIZE	Rated Pressure(psig)
SFDC44N-UL	Straightway	4 nonthreaded by 4 npt	250 PSI
SFDC54N-UL	Straightway	5 nonthreaded by 4 npt	250 PSI
SZM4040-UL	Straightway	4 nonthreaded x 4 BSP	250 PSI
SZM5050-UL	Straightway	5 nonthreaded x 5 BSP	250 PSI

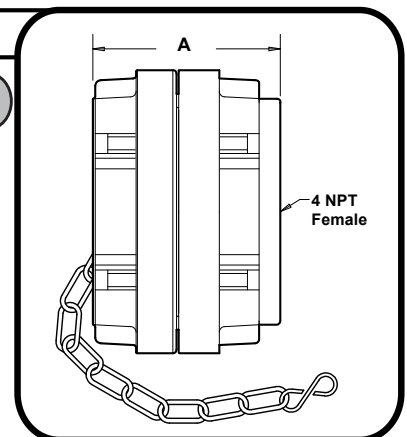

To see our complete product line please visit our website.