

STYLUS REACH® / STYLUS REACH® 18 ALKALINE BATTERY-POWERED PEN LIGHT

MARKET

APPLICATIONS: Law Enforcement, Security, Hardware/Tool, Sporting Goods, Fire & Rescue, Industrial Safety, Occupational Safety, Automotive, Gift, Consumer

DESCRIPTION: Ultra-slim pen light featuring a flexible cable extension with a high intensity LED end. Perfect for illuminating hard-to-reach or tight spaces.

CASE MATERIAL: Machined aluminum case with non-slip knurled grip.
Reach® available in black or silver anodized finish. Reach® 18 available in black anodized finish.

DIMENSIONS: Reach® Length: 14 in. (36 cm) extended and 7 in. (18 cm) folded Diameter: 0.375 in. (0.95 cm)
Reach® 18 Length: 25 in. (64 cm) extended and 13 in. (33 cm) folded


WEIGHT: Reach®: 1.7 oz (48 grams) with batteries (included with purchase)
Reach® 18: 2.5 oz (70 grams) with batteries (included with purchase)

LIGHT SOURCE: High intensity white 5mm LED, impervious to shock with a 100,000 hour lifetime.

LIGHT OUTPUT: 140 candela peak beam intensity, 24m beam distance and 11 lumens measured system output.



ON/OFF: Features momentary blink or constant “on” operation.

RUN TIME:  24 continuous hours to the 10% lumen output level.


BATTERY: 3 “AAAA” size alkaline batteries.

FEATURES: High intensity white LED.
Individually serialized for positive identification.
IPX4 Rated for water resistant operation.
2 meter impact resistance tested
Removable pocket clip.



APPROVALS*: Stylus Reach® (specific models)

 Class I, Division 1, Groups A, B, C, D, T3C Exia

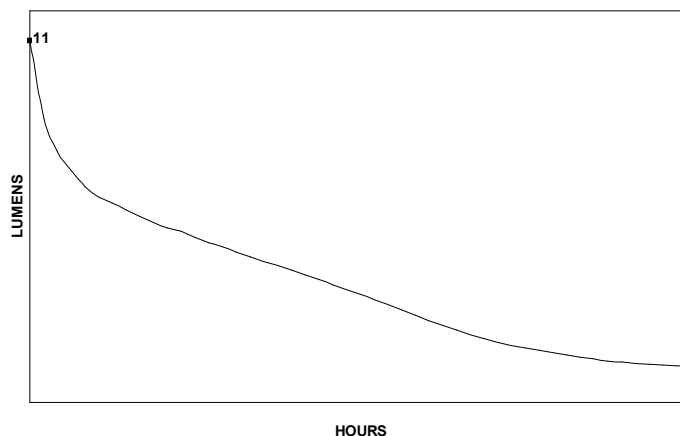
 II 2G Ex ia op is IIB T2 Gb - FTZU 11 ATEX 0057X
Ex ia op is IIB T2 Gb - IECEx FTZU 15.0026X

 Meets applicable European Community Directives.

WARRANTY: Streamlight’s Limited Lifetime Warranty.

OPTIONAL

ACCESSORIES: Lanyard

PERFORMANCE CURVE


*See product for specific ratings.

All performance claims to ANSI/PLATO FL1-2016 Standard

Issued: 10/01/2004

Revised: 02/13/2018 Rev: 6